

Распределительные щиты DIDO ACTH

ACTH distribution boards can be used in applications with wall mounted electrical installations, like containers, wooden houses. Blended cuttings on top and bottom of enclosure for entrance of various dimensions of installation channel.

Enclosures are completely assembled with all necessary parts, such as:

- ④ DIN rail
- ④ Insulated terminals, neutral and ground
- ④ Covers for free space
- ④ Needed installation accessories
- ④ Instruction manual



Surface mounted distribution board - plastic door - transparent


Type	Code No.	Number of modules	Weight [g]	Packaging [pcs]	Rows
ACTH12PT	001100120	12+2	1300	5	1
ACTH24PT	001100121	24+4	1700	5	2
ACTH36PT	001100122	36+6	2100	5	3

Conforms 850°C glow wire test according to IEC60670-24 for wooden and hollow wall installation

DIDO ACTH

Material	ABS
Color	RAL9003
Door	styrene acrylonitrile
Color	Transparent & white
Glow wire test	850°C
Terminal holder	Self extinguish material
Glow wire test	960°C
Temperature	-25°C ... +60°C
Rated voltage	AC400V
Standard	IEC60670
Halogen free	✓

Dimensions

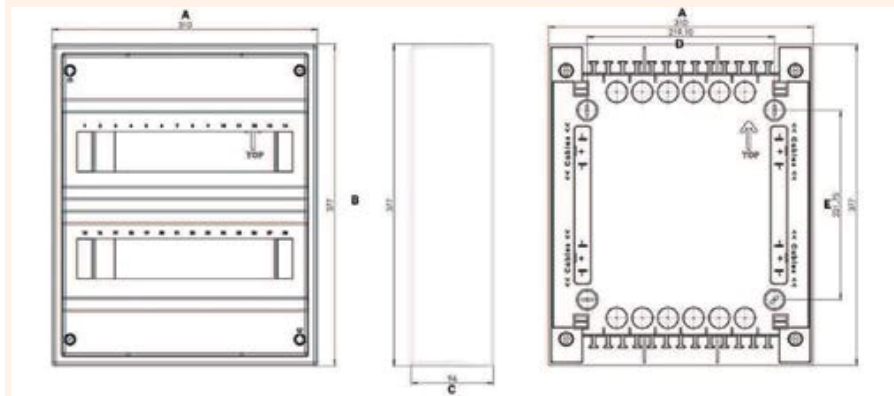

	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
ACTH12PT	310	251	96	96	219
ACTH24PT	310	377	96	219	222
ACTH36PT	310	502	96	219	347