
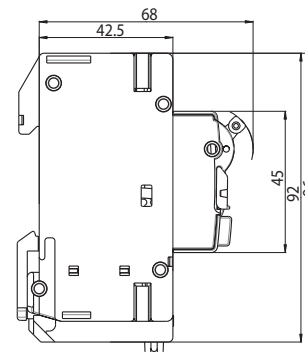
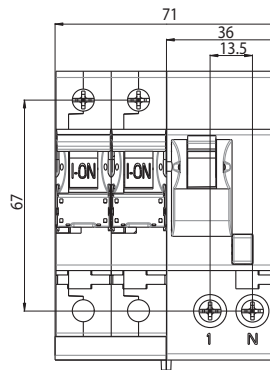


Zaštitna sklopka na diferencijalnu struju sa nadstrujnom zaštitom LIMAT

Tehnički podaci

Nazivni napon U_n	230/400 V AC
Nazivna struja I_n	6 – 50 A
Nazivna frekvencija f_n	50 / 60 Hz
Predosigurač	100 A gG
Karakteristika okidanja	B, C
Nazivna struja greške $I_{\Delta n}$	100, 300 mA
Tip diferencijalnog okidača	AC, A
Nazivna kratkospojna moć I_{cn}	10 kA; $I_n \leq 40$ A 6 kA; $I_n \geq 50$ A
Klasa selektivnosti	3
Priključna stezaljka	1 – 25 mm ² , max. 3 Nm
Standardi	IEC 61009, EN 61009

LIMAT2-SD



LIMAT4-SD

